

BIL-JAX[®]

TELESCOPIC LIFTS



BIL-JAX
A STEP ABOVE[®]

☎ 1.800.537.0540

Fax 419.445.0367

🖱 www.biljax.com


Archbold, OH

**THE BRAND YOU KNOW,
THE EXPERIENCE YOU TRUST.**

Bil-Jax has been a leading manufacturer of high quality equipment to the construction and rental industry for nearly 60 years.



Stockpicker Lift

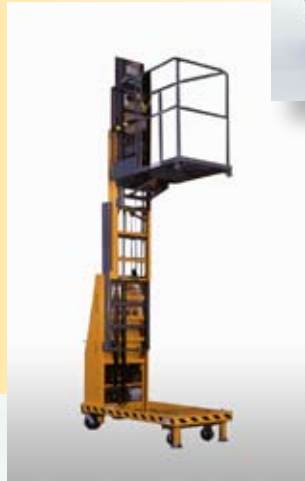

**XLT-2900
Cougar Lift**



ESP 19



Mission Statement. . .

We design and produce
HIGH QUALITY, LEADING "BRANDS"
of ENGINEERED RENTAL
AND CONSTRUCTION EQUIPMENT,

including the Number 1 brand of scaffolds, aerial lifts,
elevating trailers, event products, material carts and lifts,
and other related equipment, for the RENTAL MARKET.

We continually seek to provide a wide range of innovative
products to the RENTAL MARKET in the shortest
industry lead times backed by both before and after sale
support and training.

And we are always looking to distribute
our proven products within other related
market segments.

tomC.A.T Lifts



XLT-C.A.T. 23 Lift

This lift is mounted on four heavy duty casters (2 continuous swivel and 2 locking swivel).

The XLT-C.A.T. 23 features dual, high strength leaf chain for lifting.

This machine features an all steel construction and a durable powder coated finish.

Keyed on/off switch prevents unauthorized operation of the unit.

Emergency down valve on base of unit.

Continuous top guard rail on cage for added safety.

Rolls through a commercial doorway.

Forklift pockets are standard.

Removable cage converts unit into a 350 lb. capacity material lift.

Adjustable outriggers, with non-marring pads, are self-storing and easy-to-use.

Priced and shipped complete and ready for immediate use.



Applications vary for this versatile lift . . .

Auditorium Maintenance, Lighting, Industrial and Commercial Settings to list a few.

With the optional Spanner Kit, applications increase to include maintenance over permanent structures and seating.

Specifications - XLT-C.A.T. 23

Platform Height, maximum:	23' 7" (7.18 m)
Working Height, maximum:	30' (9.14 m)
Capacity:	300 lbs. (136 kg)
Machine Weight *:	820 lbs. (375 kg)
Base Width:	28" (.71 m)
Base Length:	61" (1.55 m)
Machine Height (stowed):	78½" (1.99 m)
Outrigger Pattern:	69" x 77" (1.75 m x 1.96 m)
Platform Dimensions:	26" x 26" (.66 m x .66 m)
Power Options:	DC 12V/92AH Deep Cycle Battery 15Amp. Charger Included
	AC 110V Pump
	Air Air Powered Unit, Motor Operates with Shop Air, 80 PSI - 150 CFM

* DC power option weight listed, deduct 66 lbs. (30 kg) for AC option.

Optional Equipment:

Part #	Description	Wt.
XLT-T3	Tool Box	5 lbs. (2.3 kg)
XLT-T4	Fluorescent Tube Holder	10 lbs. (4.5 kg)
XLT-T6	110V Outlet for Tools	3 lbs. (1.4 kg)
XLT-T7	19" x 26" Cage and Platform	35 lbs. (15.9 kg)
XLT-T9	Fiberglass Cage	65 lbs. (29.5 kg)
XLT-T14	Additional Height Package*	50 lbs. (22.7 kg)

* Available only as a factory installed option.

XLT-T15	Spanner Auditorium Kit	475 lbs. (216 kg)
Span Length Adjustment		7'10" - 9'8" (2.4 m-3 m)
Max. Span Height (to bottom of lift casters)		3'7" (1.1 m)
Width in Use (outriggers extended)		8'9" (2.7 m)
Dimensions		8'6"L x 2'11¼"W x 5'10¼"H

Spanner Kit



XLT-T15 "Spanner" Auditorium Kit allows a C.A.T. 23 Lift access above permanent seating.

Stockpicker™ Lift

Our Stockpicker™ Lifts are the most versatile of their kind.

They can be used in place of three separate lifts: a stock picker, a personnel lift and a material lift.

Provides access to overhead fixtures and stocked shelves much easier and quicker than traditional ladders or scaffolding.

Available in AC or DC power.

Adjustable guard rail provides access from three sides.

The expanded metal deck is manufactured with a slip resistant surface on the platform.

Safety interlocks do not permit the machine to operate unless floor locks are down and properly deployed.

The Power Wheel Option provides powered movement of the Stockpicker™ Lift for easy positioning.



Ideal Uses Include . . .

Stocking Shelves, Lighting Maintenance, Inventory, Access To Upper Racks, Lifting Material, HVAC Installation/Service and Overhead Painting.



Specifications - XLT-1571

Platform Height, maximum:	14' 10" (4.52 m)
Working Height, maximum:	21' (6.4 m)
Capacity:	500 lbs. (227 kg)
Machine Weight *:	994 lbs. (451 kg)
Base Width:	30" (.76 m)
Base Length:	71" (1.8 m)
Machine Height (stowed):	77¼" (1.96 m)
Platform Dimensions:	26" x 48" (.66 m x 1.22 m)
Power Options:	DC 12V/240AH Deep Cycle Battery 15Amp. Charger Included
	AC 110V Pump

* DC power option weight listed, deduct 66 lbs. (30 kg) for AC option.

Optional Equipment:

Part #	Description	Wt.
XLT-T17	Lock Latch -Keyed Controls	1 lbs. (.45 kg)
XLT-T18	Overhead Wand	3 lbs. (1.4 kg)
XLT-T19	Beeper Light	5 lbs. (2.3 kg)
XLT-T16	Power Wheel**	45 lbs. (20 kg)

** Available as a factory installed option on DC models only.

All photos and drawings are for illustration only. Always concerned with the improvement of the quality of this product, the manufacturer reserves the right to modify specifications without prior notice. Follow all applicable ANSI and OSHA Codes and Regulations for the use of this equipment. Do not use this product in areas where user can come in contact with live power.

XLT-2900 Cougar[®] Lift

Each lift is mounted on four heavy duty casters (2 continuous swivel and 2 locking swivel).

The XLT-2900 is constructed of steel and features a powder coated finish.

All machines feature dual, high strength leaf chain for lifting.

Emergency down valve on base of unit.

Continuous top guard rail on cage for added safety.

Adjustable outriggers, with non-marring pads, are self-storing and easy-to-use.

Rolls through standard 32" x 6' 8" doorway.

Forklift pockets are standard.

Choice of power options, including DC, AC or Air.

Priced and shipped complete and ready for immediate use.

Ideal Uses for the XLT-2900 Telescopic Lift . . .

Indoor and Outdoor Lighting Maintenance, Renovation Work, Painting Applications, Industrial, HVAC Installation and Acoustical.



Specifications - XLT-2900

Platform Height, maximum:	28' 10" (8.79 m)
Working Height, maximum:	35' (10.67 m)
Capacity:	300 lbs. (136 kg)
Machine Weight *:	964 lbs. (437 kg)
Base Width:	30" (.76 m)
Base Length:	56" (1.42 m)
Machine Height (stowed):	79" (2.01 m)
Outrigger Pattern:	81" x 74" (2.06 m x 1.88 m)
Platform Dimensions:	26" x 26" (.66 m x .66 m)
Power Options:	DC 2-6V/240AH Deep Cycle Battery 15Amp. Charger Included
	AC 110V Pump
	Air Air Powered Unit, Motor Operates with Shop Air, 80 PSI - 150 CFM

* DC power option weight listed, deduct 66 lbs. (30 kg) for AC option.

Optional Equipment:

Part #	Description	Wt.
XLT-T3	Tool Box	5 lbs. (2.3 kg)
XLT-T4	Fluorescent Tube Holder	10 lbs. (4.5 kg)
XLT-T6-1	110V Outlet for Tools	3 lbs. (1.4 kg)
XLT-T7-1	19" x 26" Cage and Platform	35 lbs. (15.9 kg)

ESP 19

The ESP 19 can be used in place of three separate lifts: a stock picker, a personnel lift and a material lift.

The lift provides access to overhead fixtures and stocked shelves easier and quicker than traditional ladders or scaffolding.

The ESP 19 is drivable at full height extension.

Constructed of powder coated steel for maximum strength and durability.

Manufactured with forklift pockets for easy transport.

Non-marking tires so the lift can be used on all indoor surfaces.

The lift has a slope sensor feature.

The expanded metal deck on the platform is manufactured with a slip resistant surface.

The lift features proportional controls, providing smooth operational movements.

The upper control box is ergonomically designed for user comfort.

Automatic charger and battery indicator is located on the base.

Ideal Applications for the ESP 19...

Stocking and retrieving from overhead shelves

General maintenance

Moving parcels while remaining at the same level

Material lifting and inventory



Unique cage design provides easy access to the work platform area.

Specifications - ESP 19

Platform Height, maximum:	19' 3" (5.9 m)
Working Height, maximum:	25' (7.6 m)
Capacity:	450 lbs. (204 kg)
Machine Weight:	2,650 lbs. (1202 kg)
Power Options	24V DC w/ charger
Length:	64" (163 cm)
Height	77" (196 cm)
Traveling Width	30.5" (78 cm)
Platform Dimensions:	42" L x 30" W x 30" H (107 cm x 76 cm x 76 cm)
Travel Speed - Lowered	2.6 mph (4.2 k)
Travel Speed - Elevated	.5 mph (0.8 k)
Inside Turning Radius	18" (46 cm)

Standard Equipment:

Under guard protection

Bicycle rack

Glass mat batteries

40 amp. I 10/60 charger

10 ft. retractable charging cord and storage box

All photos and drawings are for illustration only. Always concerned with the improvement of the quality of this product, the manufacturer reserves the right to modify specifications without prior notice. Follow all applicable ANSI and OSHA Codes and Regulations for the use of this equipment. Do not use this product in areas where user can come in contact with live power.

tomC.A.T. Lifts

All machines feature steel construction and a durable powder coated finish.

There is a keyed main power switch to prevent unauthorized use.

The controls are located at the base as well as in the platform.

This is the only lift of its type with a powered "Base Set" feature at the push of a button (Base Set indicator lights).

Shorter base than other competitive units - easier to maneuver in narrow aisles.

Easy access to electrical and hydraulic components.

All machines feature high strength steel lifting chains with a 10:1 safety factor minimum.

Convenient access to lifting chains for checking wear and adjustment.

Patented steel nesting mast design for minimum platform movement at extended heights.

Grease free guide system in masts.

Emergency lowering valve at base.

15', and 19' machines roll through a standard doorway - 24' machine rolls through a 36" doorway.

Built in tie downs for securing unit during transport.

Forklift pockets are provided for a convenient, alternative method of transport.

The slope sensor alerts the operator when the machine is not level, and the platform will not rise.



Ideal for confined work areas where access space is limited, such as . . .

Industrial, Construction, Inventory, Maintenance, Electrical, Acoustical, Production and Special Events.



Specifications - tomC.A.T.

	tomC.A.T. 15	tomC.A.T. 19	tomC.A.T. 24
Platform Height, maximum:	14' 8" 4.47 m	19' 3" 5.87 m	23' 8" 7.21 m
Working Height, maximum:	20' 8" 6.3 m	25' 3" 7.7 m	29' 8" 9.04 m
Capacity:	350 lbs. 159 kg	350 lbs. 159 kg	350 lbs. 159 kg
Machine Weight: (DC / AC power options)	838 lbs. 380 kg	1,201 lbs. 545 kg	1,446 lbs. 656 kg
Base Width:	30" .76 m	30" .76 m	35" .89 m
Base Length:	49" 1.24 m	52" 1.32 m	55" 1.4 m
Machine Height (stowed):	77" 1.96 m	77" 1.96 m	77" 1.96 m
Platform Dimensions:	26" x 26" .66 m x .66 m	26" x 26" .66 m x .66 m	26" x 26" .66 m x .66 m

Optional Equipment:

Part #	Description	Wt.
XLT-T3	Tool Box	5 lbs. (2.3 kg)
XLT-T4	Fluorescent Tube Holder	10 lbs. (4.5 kg)
XLT-T6	110V Outlet for Tools	3 lbs. (1.4 kg)
XLT-T7	19" x 26" Cage and Platform	35 lbs. (15.9 kg)

Bil-Jax is a Full Service Company:

Phone lines are open from 8:00 a.m. to 5:00 p.m. EST, 800-537-0540.


Fax lines open 24 hours, 419-445-0367.

Parts orders received by 10:30 am and in stock ship on the same day.

90% of parts orders are shipped within 24 hours.

Trained technicians available for over-the-phone service assistance.

Knowledgeable customer service and sales staff at your service.

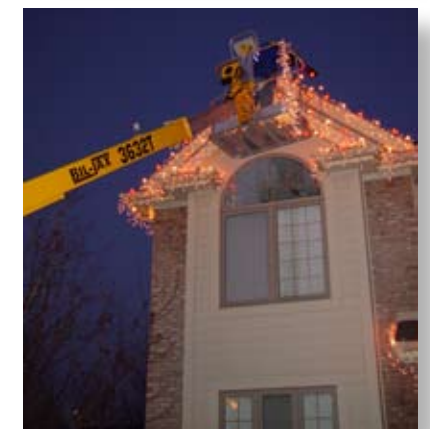

Available from Bil-Jax . . .

Models Available

Escalate Trailers

ET 1500	1500 lbs. Capacity	All trailers lower completely to the ground for easy loading and unloading.
ET 2000	2000 lbs. Capacity	
ET 4000	4000 lbs. Capacity	
ET 5000W	5000 lbs. Capacity	
ET 7000	7000 lbs. Capacity	
ET 12000	12000 lbs. Capacity	

Summit Series

2622T	Working Height - 32 ft 6in
3632T	Working Height - 43 ft 6 in
3522A	Working Height - 43 ft 2 in
4527A	Working Height - 51 ft
5533A	Working Height - 61 ft 3 in



1.800.537.0540

www.biljax.com

Fax 419.445.0367

Archbold, OH

0205-0013

Printed in the USA

© Bil-Jax, Inc. 2007

BIL-JAX, Inc. warrants its Telescopic lifts for three (3) years from the date of delivery against all defects of material and workmanship, provided the unit is operated and maintained in compliance with Bil-Jax's operating and maintenance instructions. Bil-Jax will, at its option, repair or replace any unit or component part which fails to function properly in normal use. This warranty does not apply if the lift and/or its component parts have been altered, changed or repaired without the consent of Bil-Jax or by anyone other than Bil-Jax or its factory trained personnel, nor if the lift and/or its components have been subjected to misuse, negligence, accident or any conditions deemed other than those considered as occurring during normal use. Components, not manufactured by Bil-Jax are covered by their respective manufacturer's warranties. A list of those components and their warranties is available upon written request to Bil-Jax. Bil-Jax shall not, in any event, be liable for the cost of any special, indirect or consequential damages to anyone, product or thing. This warranty is in lieu of all other warranties expressed or implied. We neither assume nor authorize any representative or other person to assume for us any other liability in connection with the sale, rental or use of this product.